

ECS4060



SLOTTED TRUNKING WITH COVER S 4/6/4 DIM. 40X60

Trunkings > Panelboards systems > Cable management >
Slotted trunkings > Slotted cable trunking > Grey - type s -
narrow slots 4/6/4

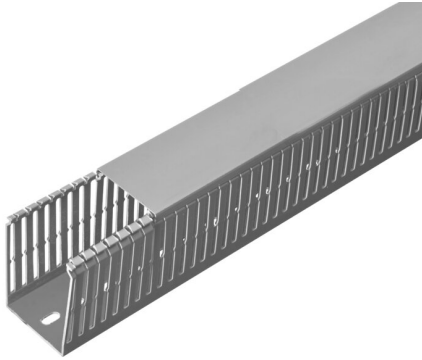


IMMAGINE
RAPPRESENTATIVA



REPRESENTATIVE
IMAGE

Technical Symbols/Marks/Approvals

UL94
V0

GWT
960°

CE

RoHS II

UK
CA

Q

UL
US

RI
A

MADE
IN
ITALY

Norms

EN 50085-1 EN 50085-2-3 UL 1565

Description

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

Etim

GROUP EG000007 - Slotted cable trunking system

CLASS EC000012 - Slotted cable trunking system

Material	Polyvinyl chloride (PVC)	Halogen free	No	Colour	Grey
Type of fastening	Bottom perforation	Width	40 mm	Height	60 mm
Length	2 m	Distance of slots	6 mm	Slit width	4 mm
Type of side wall	Hole-/slot punching	Self-extinguishing	Yes	Flexible	No
Usable cross section	1950 mm²	With cover	Yes	RAL-number	7030

Technical Characteristics

Separator predisposition NO

Documentation available for download



Certification

Certificato UL A-S
ATL AMF
E331386.pdf



Certification

RINA
DCMTVL_1005538
_380865962_2025.
PDF



Certification

Canali asolati tipo S
IMQ_EI617_2020.p
df

Barcode



8054320286431

Cardboard

56 MT

0.26x0.18x2.027 [m]

24.9984 [kg]



8033954878366

Pallet

1008 MT

449.9712 [kg]