



Meaningful Innovation.


WEEE Number: 80133970

INSTRUCTION MANUAL

LED BACKLIT PANEL

TECHNICAL DATA

MODEL	VT-61036
SKU	236246, 236256
POWER	36W
LUMENS	4320 lm
BEAM ANGLE	110°
CRI	≥80
PF	≥0.9
LIFE SPAN	50,000 Hours
ON/OFF CYCLE	25,000 Times
IP RATING	IP20
OPERATING TEMPERATURE	-10°C to +35°C
INPUT VOLTAGE	AC: 220-240V, 50/60Hz
DIMENSION	595x595x33 mm

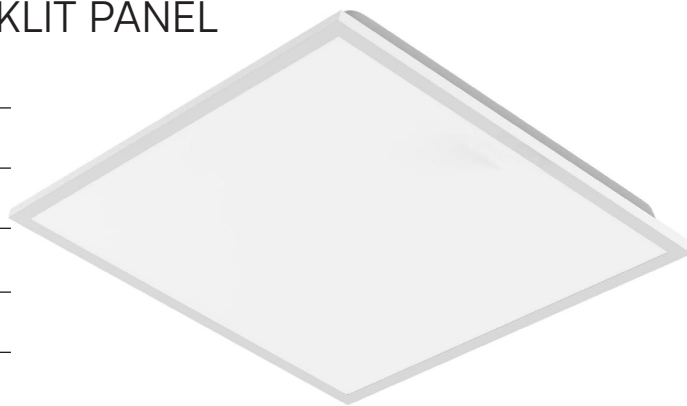

POWERED



6 YEAR
WARRANTY

LIFUD[®]
Powered by Lifud



FR
Cet appareil,
ses accessoires
et cordons
se recyclent



À DÉPOSER
EN MAGASIN



À DÉPOSER
EN DÉCHÈTERIE

OU

Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any other query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 6 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.



MULTI-LANGUAG MANUAL QR CODE

Please scan the QR code
to access the manual in
multiple languages.




This marking indicates that this
product should not be disposed
of with other household wastes.



Caution, Risk of electric shock

WARNING


- Please make sure to turn off the power before starting the installation.
- Installation should only be done by a certified electrician.
- Terminal block not included.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- For Indoor use only.



Luminaires not suitable for covering with thermally insulating material.


INSTALLATION INSTRUCTION

1

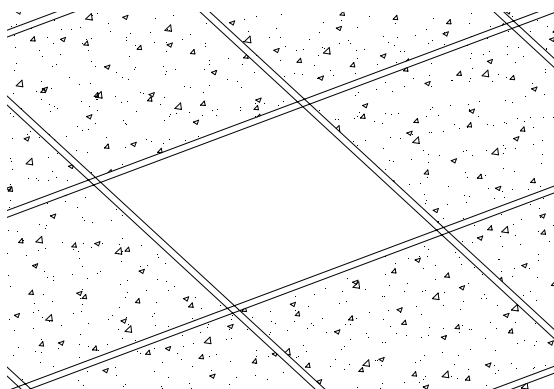


1. Make a hole ceiling

2

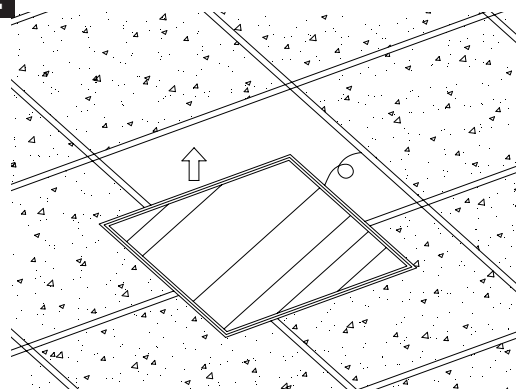


2. Put up the panel onto the ceiling

3

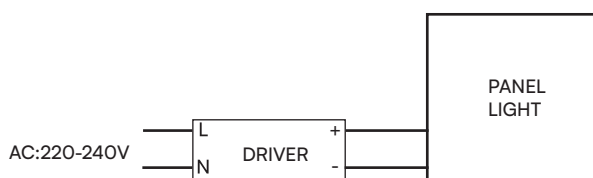

3. Wiring the DC cable of the panel to the powersupply. And wiring the AC source cable to the powersupply.

4

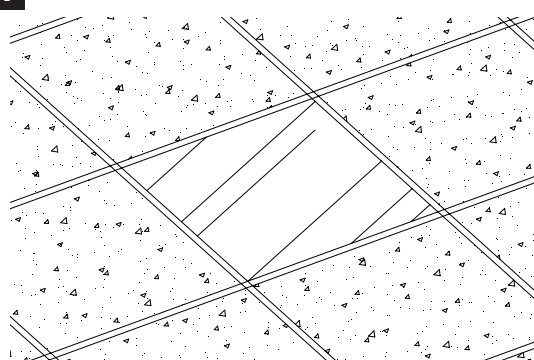

4. Turn on the switch, test the fixture light on.

RoHS



UK
CA



V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN O2, IRELAND DO2 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 OAX