

product description:

for installing devices (sensors, cameras etc.) in insulated facades from 80 mm insulation layer thickness
 suitable for common types of insulation (polystyrene, mineral wool)
 installation also in final insulated facades
 mounting plate suitable for screws with a diam. of 4 to 5mm
 permanent load capacity 15 N
 included in the package: screw carrier, mounting plate, mounting instructions, screws

Use the MDFZ 80/VDZ set for the first mounting plate installation, which also includes a manual drilling set. This drilling set is reusable.

material: PP

color: light grey RAL 7035

self-snuffing: yes, within 30 s

temperature resistance: -25 - +60 °C

flaming loop test: 850 °C

fire class of the underlying material: A1-F

weight: 97 g

meets the requirements: ČSN EN 60 670-1
 ČSN EN IEC 60670-1 ed.2









storage: ČSN 64 0090

MDFZ 80_KB – mounting plate, packed in cartons



<https://youtu.be/g2pgZ7ttQ3g>

Assembly instructions:

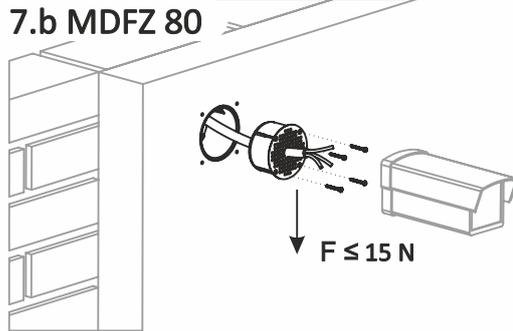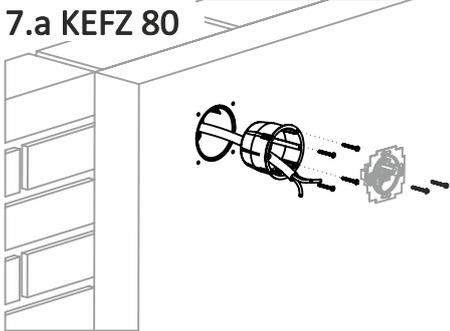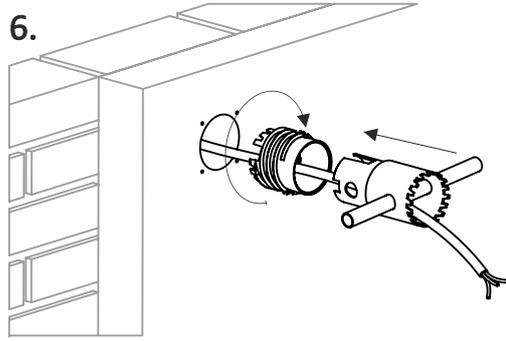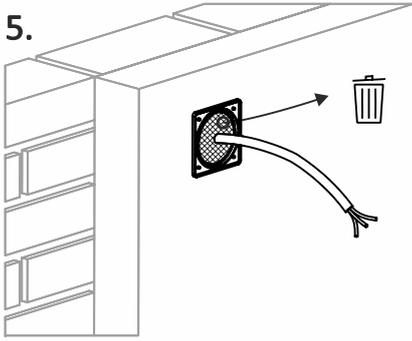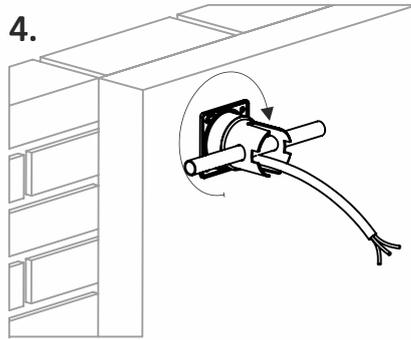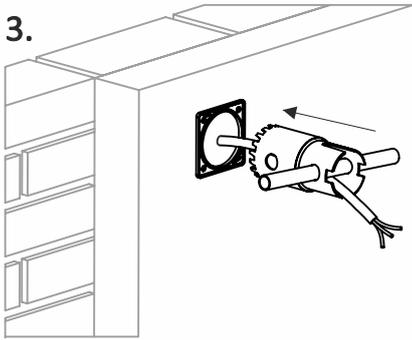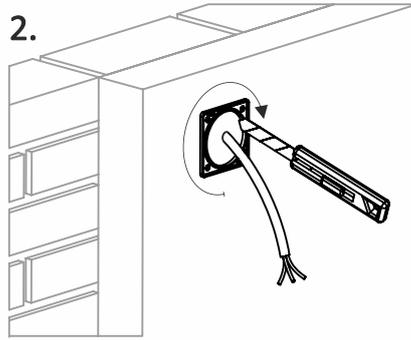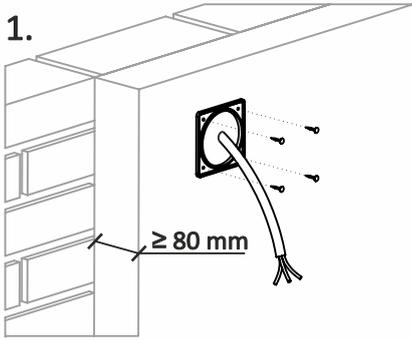

<https://youtu.be/g2pgZ7ttQ3g>